







# Three Phase String Inverter

SUN- 30 / 33 / 35 K-G03

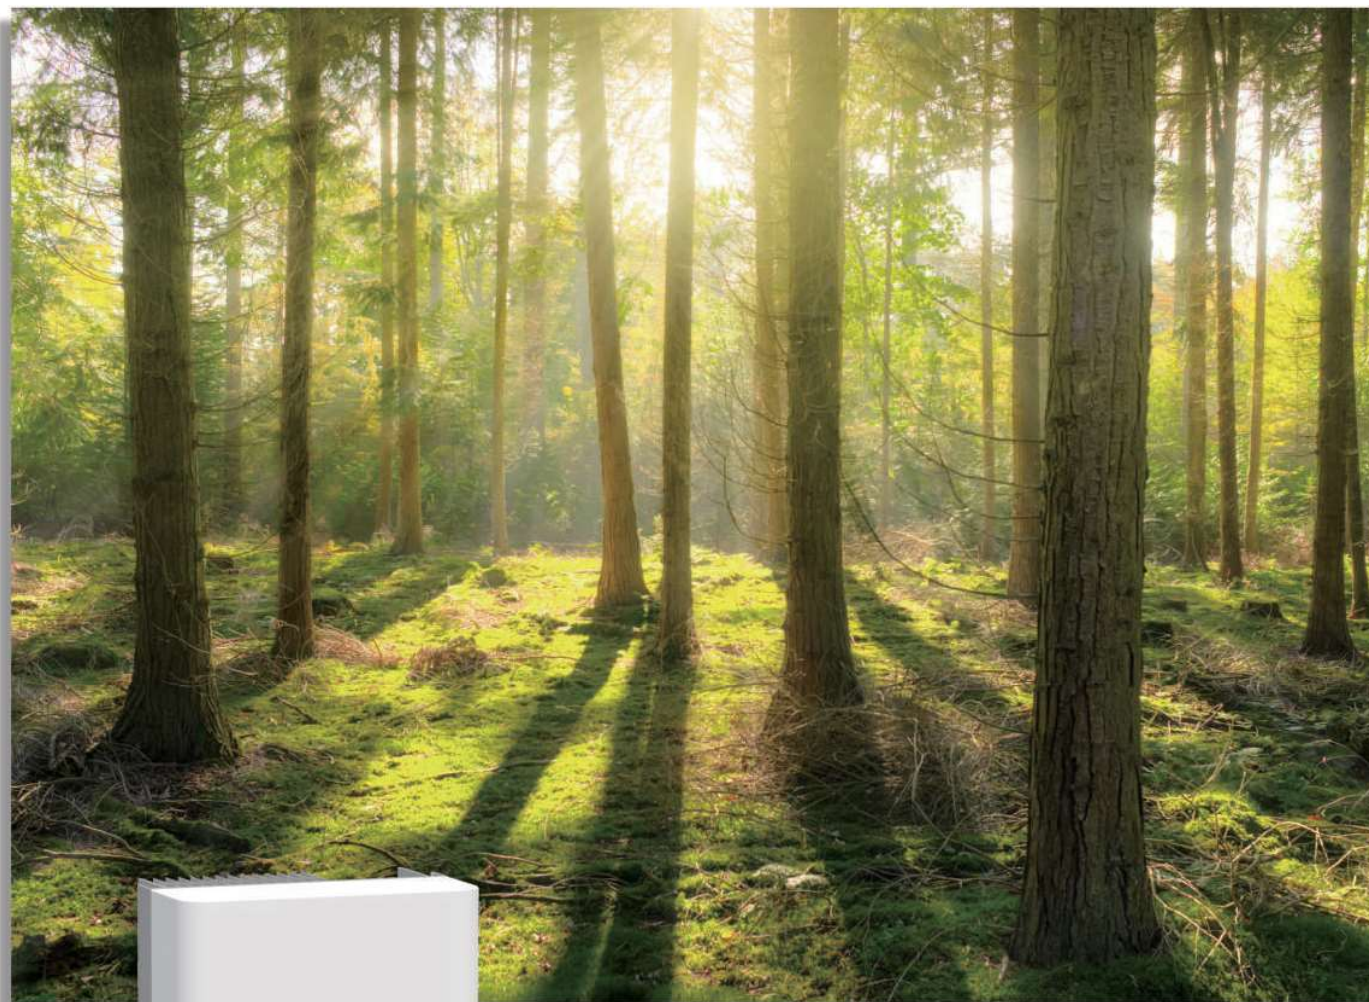

-  2 MPP trackers, Max. efficiency up to 98.6%
-  Zero export application, VSG application
-  String intelligent monitoring
-  Wide output voltage range
-  Anti-PID function (Optional)

## Technical Data

Model	SUN-30K-G03	SUN-33K-G03	SUN-35K-G03
<b>Input Side</b>			
Max. DC Input Power (kW)	39	42.9	45.5
Max. DC Input Voltage (V)	1100		
Start-up DC Input Voltage (V)	250		
MPPT Operating Range (V)	200-1000		
Max. DC Input Current (A)	40+40		
Max. Short Circuit Current (A)	60+60		
Number of MPPT	2		
Strings per MPPT	3+3		
<b>Output Side</b>			
Rated Output Power (kW)	30	33	35
Max. Active Power (kW)	33	36.3	38.5
Rated Output Voltage/Range (V)	3L/N/PE 220/380V, 230/400V 0.85Un-1.1Un (this may vary with grid standards)		
Rated Grid Frequency (Hz)	50 / 60 (Optional)		
Operating Phase	Three phase		
Rated AC Grid Output Current (A)	45.5/43.5	50/47.8	53/50.7
Max. AC Output Current (A)	50/47.9	55/52.6	58.3/55.8
Output Power Factor	0.8 leading to 0.8 lagging		
Total Harmonics Current Distortion (THDi)	<3%		
DC Injection Current (mA)	<0.5%		
Grid Frequency Range	45-55 or 55-65 (Optional)		
<b>Efficiency</b>			
Max. Efficiency	98.6%		
Euro Efficiency	97.8%		
MPPT Efficiency	>99%		
<b>Protection</b>			
DC Reverse-Polarity Protection	Yes		
AC Short Circuit Protection	Yes		
AC Output Overcurrent Protection	Yes		
Output Overvoltage Protection	Yes		
Insulation Resistance Protection	Yes		
Ground Fault Monitoring	Yes		
Anti-islanding Protection	Yes		
Temperature Protection	Yes		
Integrated DC Switch	Yes		
Remote software upload	Yes		
Remote change of operating parameters	Yes		
Surge protection	DC Type II / AC Type II		
<b>General Data</b>			
Size (mm)	362W×577H×215D (Excluding connectors and brackets)		
Weight (kg)	23		
Topology	Transformerless		
Internal Consumption	<1W (Night)		
Running Temperature	-25 to +65 °C, >45 °C derating		
Ingress Protection	IP65		
Noise Emission (Typical)	≤50 dB		
Cooling Concept	Smart cooling		
Max. Operating Altitude Without Derating	2000m		
Warranty	8 years		
Grid Connection Standard	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105		
Operating Surroundings Humidity	0-100%		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
<b>Features</b>			
Display	LCD1602		
Interface	RS485/RS232/Wifi/LAN		